
WELDING AND CUTTING AUTOMATION





Motorized weld center line adjustment

Motorized stroke width adjustment

Precise oscillation speed control

Stores up to 10 different weld programs for quick recall of frequently used processes

Linear or Radial Oscillation Capability


ALL POSITION WELDING AND CUTTING AUTOMATION CARRIAGE









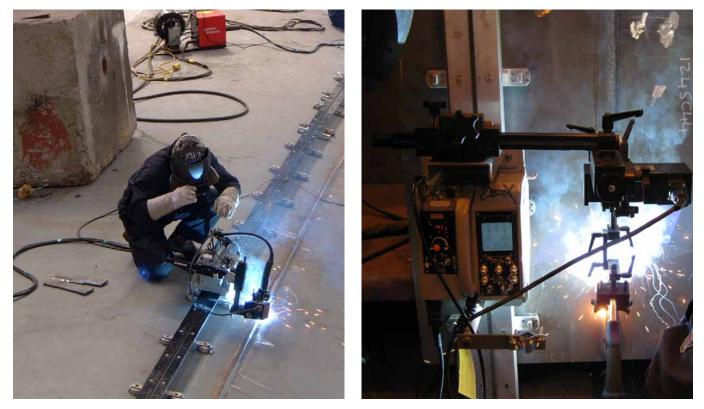

Models For All-Positions, Flat or Curved Surface Weld Oscillation

The Gullco KAT® Oscillator Package is comprised of the compact oscillator head, controls, mounting brackets, connecting cable, 1-1/8" heavy duty micro fine rack boxes with rack arms for horizontal and vertical adjustments and standard MIG gun holder, together with a KAT® carriage for rigid track or flex track as shown above.

Model Series GK-200-F (left) is supplied with a Gullco KAT® specifically designed for operation on spring steel KAT® Flexible Track. **Model Series GK-200-R** Combo (right) is supplied with a KAT® specifically designed for operation on rigid aluminum KAT® track.


All are equipped with the Gullco microprocessor-based programmable control with a closed loop feedback system for complete speed accuracy regardless of load [0-100 lbs. (45kgs)] when operating in any weld position.


Detailed information is provided on the back page of this brochure.

Also Available Are The Linear or Radial Separate Remote Controlled Compact Oscillator Assembly -Model GK-201-100-RC

This assembly is comprised of either radial or linear Oscillator Head with MIG gun holder, Remote Control Box, Control Cable (up to 20ft), Micro Fine Rack Boxes, Rack Arms, and Brackets. It can be mounted on existing KAT® All-Position Travel Carriages, Welding Head Manipulators, Side Beam Carriages, etc.



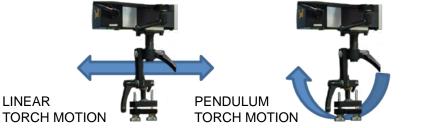



TANGENTIAL AND PENDULUM **OR LINEAR MOTION**

The oscillator heads are capable of producing three distinct motions when mounted in either the horizontal or vertical position. Shown in the above (right) is a tangential or scribing motion. The other, (middle) is a pendulum motion. Combined with the third linear straight line head they meet all welding oscillation requirements.

MOTORIZED

CENTRELINE ADJUSTMENT

With independent, electronically controlled dwells (0-5 sec.) at each end of the stroke and at the centre of the stroke path.

MOTORIZED STROKE WIDTH - Easy, precise adjustment to provide the required weld pattern.

OSCILLATION SPEED CONTROL- Oscillation speed is electronically controlled by a speed potentiometer (140 inches per minutes (linear) 45° per second (radial).

High precision, state-of-the-art controls on the KAT®

carriage automatically direct the desired forward/reverse

movement or dwell of the welding gun and its oscillation

direction to be pre-set and shown on its


motion to produce the numerous weld patterns shown

It's simply a matter of tilting the oscillator, which can be adjusted side to side or forward and

and easily with the Gullco KAT® Oscillator Head.

The proper torch angle/position is established quickly

backward this results in the elimination of the time consuming and generally ineffective procedure of tilting the carriage or track.



1771.9. St. 11/1/12 ... 97-

Combining High Precision With Exceptional Versatility

LED display in IPM or cm/min. The oscillator controls enable pre-setting of the carriage delay/start after wire feed start, dwell times, stroke speed, stroke width, program storage and cycle start. below. The carriage control enables the carriage speed and

Control information is available on the following page

Some of the Weld Patterns Attainable With the KAT® Oscillator System ANGULAR OSCILLATION PATTERN STEP OSCILLATION PATTERN KAT CARRIAGE TRAVELS CONTINUOUSLY KAT CARRIAGE TRAVELS ONLY DURING END DWELLS Oscillation Head COMBINING OSCILLATION Oscillation Head WITH OSCILLATOR HEAD VERTICAL OSCILLATOR DWEL Vertical Horizontal SPECIAL OSCILLATION Tilted - for welding on Straight Line - Back horizontal plane rth oscillation and fo A68800



OSCILLATOR CONTROL

DIGITAL DISPLAY


ARC START CONTROL

STORE UP TO 10 PROGRAMS

MOTORIZED WIDTH ADUSTMENT

MOTORIZED CENTERLINE POSITIONING

Distributed by:

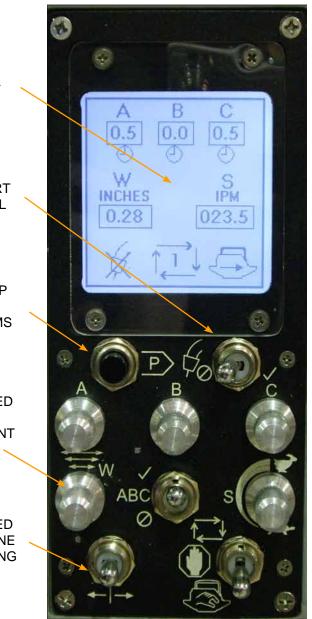

RADIAL OSCILLATOR



This advanced oscillation package is designed to increase production and improve the quality of the weld produced in automatic mechanized welding operations by minimizing weld defects such as poor penetration, incomplete fusion, overlap and undercut.

The GK-200 Series Compact Oscillator Carriage combination comes with the option for linear or radial oscillation head and can be equipped for use on either rigid or flexible track.

The oscillator is available with a linear, pendulum, tangential or step (square pattern) motion to the welding gun with adjustable motorized stroke width, infinitely variable stroke speed adjustment, three independent position dwell times, motorized centre line positioning and automatic wire feed start and travel start/stop interface.

By combining welding gun oscillation movement with the precision controlled travel speed of the Kat carriage, up to 10 weld programs can be produced and stored.

LINEAR OSCILLATOR



KAT, KBM, MOGGY, KATBAK & SAM are registered trademarks of Gullco Enterprises Limiited

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Phone: 905-953-4140		
U.S.A - GULLCO INTER Phone: 440-439-8333 EUROPE - GULLCO INT Phone: +44 1257-253579	Fax: 440-439-3634	
AUSTRALIA - GULLCO Phone: 61 (0)7 3348 5515		TY LIMITED e-mail: ausales@gullco.com
INDIA - GULLCO INTER Phone: 91-20-65260382		
CHINA - GULLCO INTE Phone: +8621-50460341		GHAI LIMITED e-mail: gsuntech@sh163.net
SINGAPORE - GULLCO Phone: +65-9385-4468	I INTERNATIONAL	LIMITED e-mail: benny.lim@gullco.com
LATIN AMERICA - GUL Phone: 55-11-9485-1336		AL LIMITED il: rogerio.macedo@gullco.com
STUCH GMBH & Co. KG Phone: (02 03) 72 94 95 Fa		ERMANY